




## REFRIGERANT LINES - Traditional flexible line kits

### Barrier Type Refrigerant Hose


All Vintage Air line kits use barrier type refrigerant line for use with HFC-134a and R-12 refrigerants. Includes adequate hose length to connect complete system, all O-ring fittings and crimp ferrules. 134a systems include fittings with service ports. Includes: 6ft. of #6, 4ft. of #8, 5ft. of #10 barrier hose. Standard or extra length kits available.

### Standard Refrigeration Line Kit

- 31700-VUD** Hose kit w/drier 134a
- 31702-VUD** Hose kit w/o drier 134a
- 31300-VUD** Hose kit w/drier R-12
- 31302-VUD** Hose kit w/o drier R-12
- 31700-VBD** Hose kit w/drier (for 134a beadlock)
- 31703-VBD** Hose kit w/o drier (for 134a beadlock)
- 31300-VBD** Hose kit w/drier (for R-12 beadlock)
- 31302-VBD** Hose kit w/o drier (for R-12 beadlock)
- 315070-VUA** Beadlock kit w/o individual bulkhead fittings

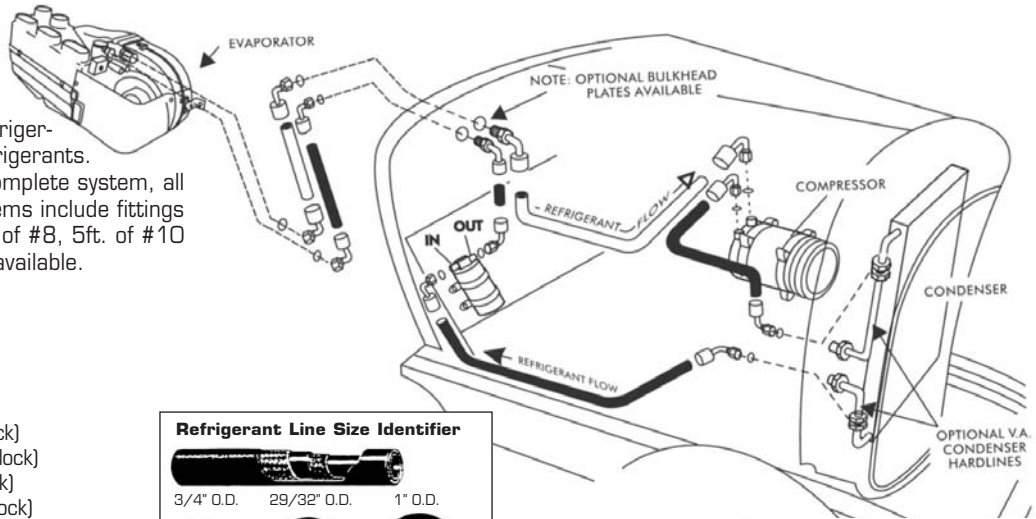

### Refrigerant Line Size Identifier



Size	I.D.	Description
#6	5/16"	Liquid hose: condenser to drier to evaporator
#8	13/32"	Discharge hose: compressor to condenser
#10	1/2"	Suction hose: evaporator to compressor

### Barrier Refrigerant Hose

- 31854-VUD** #6 Hose (specify length)
- 31855-VUD** #8 Hose (specify length)
- 31856-VUD** #10 Hose (specify length)



### Standard Heater Hose Kits

Choose straight or 90° firewall bulkhead fittings. Includes: 10 feet of 5/8" heater hose, 2 standard male O-ring 90 degree bulkhead fittings (or 2 standard straight bulkhead fittings), 2 female O-ring 90 degree fittings and 8 hose clamps.

- 31400-VUD** 90° bulkhead fitting heater hose kit
- 31401-VUD** Straight bulkhead fitting heater hose kit

## We Recommend Safety Switches In All A/C Systems

### Trinary Switch Kit

Low pressure and high pressure compressor clutch cut off functions PLUS electric fan engagement signal at 254 psi. 30 psi low pressure cut off. 406 psi high pressure cut off. Recommended for all electric fan installations.


- 24676-VUS** Trinary switch kit for barb crimp
- 24678-VUS** Trinary switch kit for beadlock crimp
- 11076-VUS** Replacement female thread trinary switch only



### Binary Switch Kit

Combines high and low pressure functions into one switch. 30 psi low pressure cutoff, 406 psi high pressure cutoff.

- 24677-VUS** Binary switch kit for barb crimp
- 24679-VUS** Binary switch kit for beadlock crimp
- 11078-VUS** Replacement female thread binary switch only



### Threaded Adapter

For installing female threaded trinary or binary switches into our standard or chrome driers.

- 18103-VUG** Adapter (not compatible with Pro Line driers)



### Switch Fitting

Pressure switch fitting. 3/8" female O-ring x 3/8" male O-ring w/ female switch installation fitting.

- 34098-VUG** Switch fitting



## RESEARCH AND DEVELOPMENT

Maybe this should be a Totally Cooled Gallery car but it really served us as a R&D project. This is another Camaro from automotive engineer, Mark Stielow. The car was designed to participate in one of Car & Driver Magazine's grueling "One Lap Of America" events. We learned a lot about endurance and created one of our first Sure Fit Systems on this car.

